customized face plates & panels







Four Star Wire & Cable established its business knowing that it's not just wire, it's service. Our unparalled service, matched with our extensive inventory, goes way beyond the everyday as we set our own standards based on the "Customer First" philosophy. This customer focused reputation in the industry is growing with each passing year and we would like to invite you to be a part of it.

wire, wire, wire

Four Star Wire & Cable distributes most major brands of wire and cable. This allows us to satisfy any requirements that you may have to complete your project.

unmatched inventory

Our inventory is second to none. Four Star Wire & Cable stocks millions of feet of cable in our warehouses which allows us to deliver quickly and efficiently. Our orders are processed and shipped the same day.

wire twisting, custom cutting and packaging options

Allow Four Star Wire & Cable to fulfill your company's needs. After all, your unique business needs require a unique business approach.

custom dyeing & striping

We can custom dye or stripe your wire to take the guesswork out of your installations. This process is done right here in our facility and is done to your specifications and needs.

custom laser etching/cutting

Our in-house custom laser and cutting services allows us the capabilities to create custom-cut and imprinted metal plates of any type for your installation and mobile projects.

your connection connection

A full line of compression fittings, metal casings and bushings are in stock and available for all your connection needs.

custom assemblies

All assemblies are made right here in our facility. This allows us to create and construct all of your custom audio, video and data assemblies and deliver them to you quickly and correctly.

tools, testors and ties

Four Star Wire & Cable stocks a complete line of all the tools of the trade and a variety of other peripheral products to make us your one stop for all your needs.

same day shipping

Because your order is important to you, and to us, Four Star Wire & Cable uses a state-of-the-art operating system that allows us to ship your order quickly and track it to verify that it reaches its destination.

WALL PLATES/PANELS

For professional sound and video installations, Four Star Wire & Cable, Inc., offers single or multiple-gang wallplates for industrial, institutional, or residential use. Wallplates can be built with a wide variety of connectors; pictured below are several examples of the many combinations available. We offer three options of labeling; Laser-etched lettering for the perfect final touch to your system. Brushed Stainless Steel is our standard finish, and Brass, Black, and Aluminum finishes are also available. Due to the many different combinations of connectors, or for custom color needs, to order wallplates or 19" rackplate, simply call your MyStarSound® Account Representative at 1-877-789-1626.

Some of the connectors available...

- 1/4" TRS-Locking Female
- BNC (Feed-Through)
- XLR Male D-Series (specify metal or plastic)
- XLR Male P-Series (specify metal or plastic)
- XLR Female D-Series (specify metal or plastic)
- XLR Female P-Series (specify metal or plastic)
- Speakon Panel Mount (specify 4 or 8 contacts)
- S-Video
- RCA Female
- F Conn
- HD15
- DB9 / DB15 / DB25
- 3.5mm TRS
- DVI
- HDMI
- CAT5E/6 Jacks
- Display Port

For XLR connectors, a locking, or non-locking option is available, just specify which is appropriate for your needs when ordering. If you don't see what you need listed, please call and talk to your MyStarSound[®] Account Representative for a complete run-down of connectors available.

RECESSED WALL PLATES

We now offer black powder coated aluminum wall plates, our standard size is 5" x 7". For more information on sizes and connector configurations please contact your MyStarSound sales representative.



connectors & accessories

CONNECTORS

At Four Star Wire & Cable, Inc., we want you to know that we build the finest and most reliable cable assemblies, but we'd also like to let you know that we can be your best source for all your Audio, Video, Data transmission and power connector needs. Listed below are just some of the many brand name connectors that we keep in stock. We don't have space here to list all, so please call your MyStarSound[®] Account Representative at 1-877-789-1626 for an up-to-date connector inventory.

CRIMP, SOLDER, COMPRESSION, SCREW TERM, FEED THRU

- RCA
- BNC
- XLR
- Phone / Data Plates, Plugs and Jacks (all categories)
- RJ11 / RJ45
- 1/4" Phone Plugs
- 3.5mm / 2.5mm Plugs and Jacks
- Circular Conn
- Midi
- Din Plugs
- Mini Din Plugs

- DB 9, 15, 25 Connectors
- Centronics
- HD15
- F-Conn
- Speakon Plugs and Jacks
- S-Video
- Banana
- Gender Changers
- Fiber Optics
- Electrical Products

(FOR NEUTRIK PANEL MOUNT CONNECTORS ONLY)

PART

DSS - LETTER PLATE FOR D-SERIES (available colors - black, brown, red, orange, yellow, green, blue, violet, gray, white)

DBA - DUMMY PLATE FOR D-SERIES CUT OUT

SCDX - HINGED COVER SEALS D-SIZE CHASSIS CONNECTORS (IP42 RATED)

SCCD-W - SPRING LOADED COVER SEALS D-SIZE CHASSIS CONNECTORS (IP65 RATED)

SCDP - D-SIZE SEALING GASKETS (available colors - black, white, blue, red, yellow, green)

PLUS

TOOLS, TIE WRAPS, HEAT SHRINK, MESH, PULL ROPE, INSTALL RODS, WIRE CADDYS, AND MANY MORE INSTALLATION PRODUCTS



grommets/split plates

GROMMET/SPLIT PLATES

MyStarSound offers a wide variety of custom wall and face plates, grommet plates are another category of plate that have a very versatile use in the Pro Audio and install cable industry. Anywhere from a 1 gang to 6 gang are offered in stainless steel and black anodized aluminum is offered in 1 gang to 4 gang. For additional customization or information on pricing and availability contact your MyStarSound sales representative.

Part Number	Description ~ Lengths
FWP1G - 34ID	1 gang SS w / 3/4" grommet
FWP1G - 1IDVS	1 gang SS vertical split w /1" grommet
FWP2G - 21DHS	2 gang SS horizontal split w /2" grommet
FWP2G - 25ID	2 Gang SS w / 2.5" grommet
FWP3G - 3ID	3 gang SS w / 3" grommet
FWP3IDVS	3 gang SS Vertical Split w / 3" grommet
FWP3G-2ID	3 gang SS w / 2" grommet



FLOOR BOXES

Available in two different variations, 8"x8" and 6" x 4.75". Configurable to your exact specification, allowing for a wide selection of connectors. Plates can be cut and etched in Stailnless or Black Anodized Aluminum. Easy to Install and Very Durable!



VOICE & DATA MODULES



CAT 6 HD Connector IC1078E6xx*

8 Position 8 Conductor, Category 6, RJ-45 *xx=AL (Almond), BK (Black), BL (Blue), GN (Green), GY (Gray), IV (Ivory), OR (Orange), PR (Purple), RD (Red), WH (White), YL (Yellow).



Voice Connector IC1076VOxx*

6 Position 6 Conductor, Category 3, RJ-11 *xx=AL (Almond), BK (Black), BL (Blue), GN (Green), GY (Gray), IV (Ivory), OR (Orange), PR (Purple), RD (Red), WH (White), YL (Yellow)



Voice Coupler IC107C8VRxx* *xx=BK (Black),GY (Gray), IV (Ivory), WH (White).

AUDIO & VIDEO MODULES



RCA Female to Female Connectors Gold Plated with colored inserts DESCRIPTION PART NUMBER IC107K6Gxx* Black Insert IC107L6Gxx* Blue Insert IC107G6Gxx* Green Insert *xx=AL (Almond), BK (Black), IV (Ivory), WH (White).



Speaker Connector Gold Binding Post PART NUMBER IC107PMGxx* IC107L8Gxx*

IC107G8Gxx* *xx=AL (Almond), IV (Ivory), WH (White).



PART NUMBER IC107JMGxx* DESCRIPTION S-VHS to IDC *xx=AL (Almond), IV (Ivory), WH (White), GY (Gray).

FACEPLATES



Angled Faceplate IC107DA1xx 1 Port Single IC107DA2xx* 2 Port Single IC107DA4xx* 4 Port Single *xx=AL (Almond), IV (Ivory), WH (White), GY (Gray).



Faceplate IC107FO1xx* 1 Port Single IC107FO2xx* 2 Port Single IC107FO3xx* 3 Port Single IC107EO4xx* 4 Port Single IC107FO6xx* 6 Port Single *xx=AL (Almond), IV (Ivory), WH (White), GY (Gray).



Decorex Faceplate IC107DFSxx* 1 Insert Opening Single *xx=AL (Almond), IV (Ivory), WH (White).



Decorex Insert ICRDSDBBPxx* 4 Binding Post IC107DC2xx* 2 Port & CATV *xx=AL (Almond), IV (Ivory), WH (White).





Stainless Steel Faceplate IC107SF1SSxx* IC107SF2SSxx* IC107SF3SSxx* IC107SF4SSxx* IC107SE6SSxx* IC107DF4SSxx* IC107DF8SSxx*

4 Port Double 8 Port Double



8 Port Single 12 Port Single 9 Port Single 12 Port Single *xx=IV (Ivory), WH (White), GY (Gray).

*xx=IV (Ivory), WH (White), GY (Gray).

1 Port Single 2 Port Single 3 Port Single 4 Port Single 6 Port Single



CAT 5e Connector IC1078E5xx*

8 Position 8 Conductor, Category 5e, RJ-45 *xx=AL (Almond), BK (Black), BL (Blue), GN (Green), GY (Gray), IV (Ivory), OR (Orange), PR (Purple), RD (Red), WH (White), YL (Yellow).



ScTP CAT 5e Connector IC1078S500



Fiber Optic Adapter IC107ST2xx* IC107SC2xx* GY (Gray), IV (Ivory), WH (White).

RCA Female to F-Type Connectors

DESCRIPTION

Red Insert

Black Insert

Blue Insert

Gold plated with colored inserts



RCA Female to IDC Connectors IDC allows signal transfer over UTP cable. Gold plated with colored inserts PART NUMBER DESCRIPTION IC107K8Gxx* Black Insert IC107L8Gxx* Blue Insert IC107G8Gxx* Green Insert *xx=AL (Almond), BK (Black), IV (Ivory), WH (White).

> Speaker Connector Gold Banana Jack PART NUMBER IC107JMGxx* *xx=AL (Almond), IV (Ivorv), WH (White),

PART NUMBER

CAT 6 EZ Connector

8 Position 8 Conductor, Category 6, RJ-45

*xx=AL (Almond), BK (Black), BL (Blue), GN (Green),

8 Position 8 Conductor, Category 3, RJ-45 *xx=AL (Almond), BK (Black), BL (Blue), GN (Green),

GY (Gray), IV (Ivory), OR (Orange), PR (Purple),

RD (Red), WH (White), YL (Yellow)

GY (Gray), IV (Ivory), OR (Orange), PR (Purple), RD (Red), WH (White), YL (Yellow).

IC1078I 6xx*

Voice Connector

CAT 5e Coupler IC107C5Exx*

*xx=BK (Black).

IC1078V3xx*

2 GHz 3GHz IC107B5Gxx* IC107B5Fxx*

IC107AF2xx*

IC107AF4xx*

IC107AF8xx*

Faceplate

IC107FD8xx*

IC107F12xx*

IC107FT9xx*

IC107FT4xx*

DESCRIPTION IC107B9Gxx* Female, Gold IC107B9Fxx* Female, Nickel *xx=AL (Almond), BK (Black), IV (Ivory), WH (White).

Faceplate w/Station ID Angles IC107AS2xx* 2 Port Single IC107AS4xx³ 4 Port Single IC107AS8xx* 8 Port Single *xx=IV (Ivory), WH (White), GY (Gray).

Faceplate w/Station ID IC107S02xx* IC107S03xx* IC107S04xx* IC107S06xx* IC107S08xx* IC107ST9xx*

2 Port Single 3 Port Single 4 Port Single 6 Port Single 8 Port Double 9 Port Triple *xx=IV (Ivory), WH (White), GY (Gray).

Decorex Insert ICRDSDBBPxx* 4 Binding Post IC107DC2xx* 2 Port & 2 CATV *xx=IV (Ivory), WH (White), AL (Almond).

Electrical Faceplate	
IC106FP2xx*	2 Port Single
IC107DP1xx*	2 Port Insert
IC1074P1xx*	3 Port Insert
*xx=IV (Ivory), WH (White), AL (Almond).



*xx=AL (Almond), BK (Black), IV (Ivory), WH (White). PART NUMBER IC107BSSBK DESCRIPTION Audio Speaker Spring Clip Color = BK (Black)

WH (White).


PART NUMBER

IC107RFGxx*

IC107KFGxx*


IC107LFGxx*





Feedthrough female-to-female connector used for CCTV and security cameras. DESCRIPTION IC107B3Gxx* 50 Ohm. IC107BNCxx* 75 Ohm *xx=AL (Almond), BK (Black), IV (Ivory),

-101 .

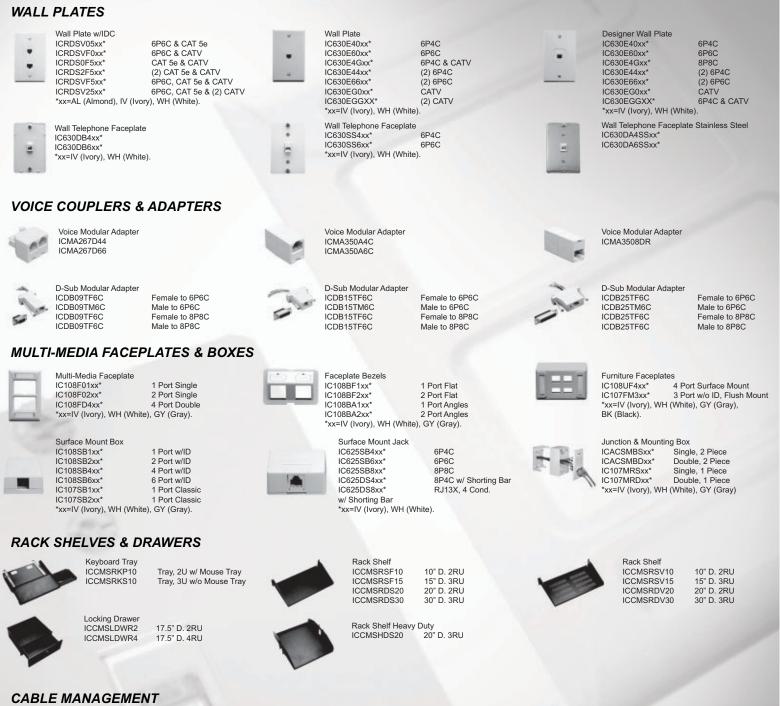

Metal Ring Panel ICCMSCMP31 Ring Panel. 1RU Ring Panel. 2RU ICCMSCMP32 Interbay Panel. 1RU ICCMSCMP51 ICCMSCMP52 Interbay panel. 2RU



Blank Panel ICCMSCMPB1 ICCMSCMPB2 ICCMSCMPB3

Blank 1RU Blank 2RU Blank 3RU



Cable Management Ring ICCMSCMPR1 ICCMSCMPR2 ICCMSCMPR3 ICCMSCMPR4

Single Ring 1.70" Single Ring 3" Double Ring 3" Double Ring 6"

TOOLS



IC110 & 66 Single Blade Punch Down Tool ICACSPDT00 Punch Down Tool w/110 & 66 Blade



Cable Stripper Tool ICACSCSUTP UTP Cable Stripper Tool ICACSCSCTV CATV Cable Stripper Tool

To Order Call: MI 1-877-789-1626, TN 1-877-853-8106 or visit fourstarwire.com

shelves and chassis

Middle Atlantic Products have become a standard of the industry and offer engineered mounting solutions to fulfill most of your installation needs. Four Star Wire & Cable is a proud distributor of these products and we are eager to help you acquire the best ones to meet your needs. In addition to the items shown here, Middle Atlantics catalog offers an extensive array of enclosure systems, power distribution, thermal management, cable management, custom rackmounts, rack accessories and technical furniture.

SB Series Panels

A textured black powder coat finish is used throughout the SB Series. Flanged for strength, each model is made from 16-guage steel. Available in 1, 2, 3, 4, 5 and 6 rack space configurations.



Universal Rack Shelves

These easy-to-install universal shelves accommodate components up to 17 3/8" wide. Made from 16-gauge steel, finished in a durable black powder coat and individually boxed. Available in 1, 2, 3 and 4 rack space configurations.

EB/FEB Series Panels

Available in a choice of flanged or flat style, these economical steel blank panels feature a durable black powder coat finish. EB Series panels are a 16-guage, FEB Series Panels are 14 gauge steel. Available in 1, 2, 3, 4, 5 and 6 rack space configurations.



EVT Vent Panels

Featuring an aesthetically pleasing vertical slotted design, EVT series vent panels have a 17% open area and are available with a 16-gauge steel construction in a black powder coat finish (EVT) or an aluminum construction with a choice of a black brushed and anodized (EVTA) or silver brushed and anodized finish (EVTC). Available in 1 or 2 rack space configurations.



HBL/CHBL Series Panels

Eye-pleasing aesthetics and flat, 11-gauge aluminum construction combine in this easy-to-machine series of blank panels. Black brushed and anodized or silver brushed and anodized finish.



RSH Series Custom Rackmounts

With the innovative RSH custom rackmounts, virtually any component can be installed in a standard 19" enclosure without modification. Custom cut to provide a perfect opening for the face of the component that is being mounted, each RSH unit provides a neatly-trimmed installation with a perfect fit and no gaps. With accurate details on over 8,000 components in our measured unit database, chances are we have the component needed on file.



Store CD's, DVD's, VHS tapes and other recorded media in our rackmount media holders. Partitioned to prevent the contents from tipping, each model features a 16-gauge flanged aluminum face and has a black brushed and anodized or silver brushed and anodized finish. All stored media protrudes 3/8" to allow quick retrieval

shelves and chass



Heavy Duty D, DC and TD Series Drawers Fully enclosed top with inside dimensions measuring 15 7/8" wide by 14 1/2" deep, the D, DC and TD series drawers feature spring-loaded latches and rugged, straight-forward construction. Installed keylock option available for black anodized and textured models.



SS & SSL Sliding Shelves The SS sliding shelf is both functional and rugged. Capable of latching in an open or closed position, the shelf slides on ball bearings and extends a full 14" and mounts to any rack (rear rackrail required in steel racks). Occupies slightly more than a single rackspace. The SSL fills just a single rackspace. The low profile sliding shelf extends 10" on nylon roller slides equipped with positivestop lockouts.



Horizontal Cable Managers

Organize patch cords and maintain a required bend radius. Available in a wide variety of styles to suit any application. The D-Ring provides a creative solution for adding individual D-Rings to a rack or on a wall using appropriate fasteners. Select styles also available in 23" panel widths. For optimal performance, do not exceed a 50% fill rate when passing cables through cable rings. Finished in a durable black powder coat.



offers a wide variety of Rack Screws. Whether premium, standard or security

Rack Screws Middle Atlantic


rack screws, each application that you may need has been addressed.



Used in conjunction with Middle Atlantic's security rack screws, the TBIT, SPBIT and SBIT allow for security when needed.



Configured A/V Enclosures The MRK series 19" gangable rack enclosures feature a narrow design for large multi-bay jobs. They're fully welded and have 1/8" thick structural steel internal braces.





The two rackspace Ultra Quiet Fan Panel System provides smart cooling and monitoring to ensure a reliable installation in areas where fan noise is not an option, including boardrooms, classrooms, offices, houses of worship etc. Thermostatic proportional speed fan control ensures ultra quiet operation by varying fan speed based on enclosure temperature. Overtemp notification, local and remote, offers additional operation monitoring. A feature unique to this system provides notification in the event of fan failure via a local display or remote signal to an external alarm device. Several models to choose from in 2 fan and 4 fan configurations.

Fans

Featuring smooth, ball bearing design, the 115v fans mount flush and come in 4 1/2", 6" and 10 models

twist-lock /single pole devices

NEMA Rating	Nema Po	les AC H	IP	Plug	Conn	ector Body		Flanged Receptacle	Flanged Inlet
Amps Color Coded by voltag 125V	L5-15	ires Ratir 0.5	HBL4720C	All Black HBL4720CBK	Black/White HBL4729C	All Black HBL4729CBK	Receptacle HBL4710	HBL4715C	HBL4716
15 250V	L6-15	1.5	HBL4570C HBL2311	HBI 0244BK	HBL4579C HBL2313	HBL2313BK	HBL4560 HBL2310	HBL4585C HBL2316	HBL4586 HBL231
125V 125V	L5-20 L5-20		HBL2311	HBL2311BK HBL2311EBK	HBL2313	HBL2313EBK	HBL2310	HBL2310	HBL231
20 250V	L6-20 2 P		HBL2321	HBL2321BK	HBL2323	HBL2323BK	HBL2320	HBL2326	HBL232
250V 480V AC	L6-20 3 W L8-20	Vire 2 3	HBL2341	HBL2321EBK	HBL2343	HBL2323EBK	HBL2340	HBL2346	HBL234
20 125V	L5-30	2	HBL2611	HBL2611BK	HBL2613	HBL2613BK	HBL2610	HBL2616	HBL2615
250V	L6-30 L8-30	2	HBL2621 HBL2641	HBL2621BK	HBL2623 HBL2643	HBL2623BK	HBL2620 HBL2640	HBL2626 HBL2646	HBL2625 HBL2645
480V AC 125/250V	L14-20	2 (1)		HBL2411BK	HBL2043	HBL2413BK	HBL2040 HBL2410	HBL2416	HBL204
20 3Ø250V AC	L15-20	3	HBL2421		HBL2423		HBL2420	HBL2426	HBL2425
3Ø480V AC 125/250V	L16-30 3 Po L14-30	ole/ 5 2	HBL2431 HBL2711	HBL2711BK	HBL2433 HBL2713	HBL2513BK	HBL2430 HBL2710	HBL2436 HBL2716	HBL2435 HBL2715
30 3Ø250V AC	L15-30	3	HBL2721		HBL2723		HBL2720	HBL2726	HBL2725
3Ø480V AC 3ØY 120/208V AC	L16-30 L21-20	10	HBL2731 HBL2511	HBL2511BK	HBL2733 HBL2513	HBL2513BK	HBL2730 HBL2510	HBL2736 HBL2616	HBL2735 HBL2515
20 3ØY 277/480V AC	L22-20 4 P		HBL2521	HBEZJIIBK	HBL2523	TIDE2515DR	HBL2520	HBL2526	HBL2525
30 3ØY 120/208V AC	L21-30 5 W		HBL2811	HBL2811BK	HBL2813	HBL2813K	HBL2810	HBL2816	HBL2815
NEMA DEVICES	L22-30	10	HBL2821	-	HBL2823		HBL2820	HBL2826	HBL2825
20 20A 250V		Pole/	HBL3521C		HBL3523C		HBL3520	HBL3525C	HBL3524
10A 60DV AC	5 V	Vire	TIBEJJZTO		TIBESSES		TIBE3320	TIBESSES	TIDE 3324
MP DEVICES	1 100								
50 125/250V AC		/4W	CS6365C		CS6364C		CS6369		CS6375
150 Amp, Plugs Description Thermoplastic elastomer,	Male HBL15M	X	Female HBL15Fx		500 Amp Recepta Stud Typ Description Thermopla	cles e 11/16" x3/4	Fema		Malee HBL15MRS
cable size #8 - #2 AWG		-		-	panel mou				-
Tees		5	-		150 Amp Recepta Double S		-	5	A
Description	Tapping	Тее	Paralleling		Description	า	Fema	le	Male
Fits 150 amp plugs and receptacles	HBL15T	x	HBL15PTx		Thermopla	stic, #8 - #2 AWG	HBL1	I5FRx	HBL15MR
Gender Reversing	-		- Parts	-	150 Amp				8
Devices Description Fits 150 amp plugs	Double M HBL15D		Double Femal HBL15DFx	e	Weather Description Use with st	Protective Co und type or doub			Catalog Nur HBL15NCx
Devices Description				•	Weather Description Use with st set screw r	Protective Co ud type or doub eceptacles			
Devices Description Fits 150 amp plugs				e	Weather Description Use with st set screw r 300/400	Protective Co ud type or doub eceptacles	le		
Description Fits 150 amp plugs and receptacles	HBL15D			>	Weather Description Use with st set screw n 300/400 Weather Description	Protective Co uud type or doub eceptacles Amp, Protective Co	le overs		HBL15NCx
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs	HBL15D	Mx	HBL15DFx	evices	Weather Description Use with si set screw r 300/400 Weather Description Use with si	Protective Co uud type or doub eceptacles Amp, Protective Co uud type or doub	le overs		
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles	HBL15D Fits Male HBL15M	Mx Devices ICAPx	HBL15DFx Fits Female D HBL15FCAPx	evices	Weather Description Use with si set screw r 300/400 Weather Description Use with si set screw r	Protective Co uud type or doub eceptacles Amp, Protective Co	le overs		HBL15NCx Catalog Nui HBLNCxx
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W	HBL15D Fits Male HBL15M V(White), GN(Gr	Mx Devices ICAPx reen), R(Re	HBL15DFx Fits Female D HBL15FCAPx	evices	Weather Description Use with si set screw r 300/400 Weather Description Use with si set screw r	Protective Co uud type or doub eceptacles Amp, Protective Co uud type or doub ecceptacles 300/400A: BK(BI	le ack), W (White		HBL15NCx Catalog Nu HBLNCxx R(Red) and E
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S	HBL15D Fits Male HBL15M V(White), GN(Gr	Mx Devices ICAPx reen), R(Re	HBL15DFx Fits Female D HBL15FCAPx	evices	Weather Description Use with sit set screw r 300/400 Weather Description Use with sit set screw r xx=color for	Protective Co dud type or doub ecceptacles Amp, Protective Co dud type or doub ecceptacles 300/400A: BK(BI BN(B	le ack), W (White	»), GN (Green), f	HBL15NCx Catalog Nu HBLNCxx R(Red) and E
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W	HBL15D Fits Male HBL15M V(White), GN(Gr	Mx Devices ICAPx reen), R(Re	HBL15DFx Fits Female D HBL15FCAPx	evices	Weather Description Use with si set screw r 300/400 Weather Description Use with si set screw r	Protective Co dud type or doub ecceptacles Amp, Protective Co dud type or doub ecceptacles 300/400A: BK(BI BN(B	le ack), W (White	»), GN (Green), f	HBL15NCx Catalog Nu HBLNCxx R(Red) and E
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S 300 Amp, Plugs Description	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10 Male	Mx Devices ICAPx een), R(Re 6	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue).	evices	Weather Description Use with sit set screw n 300/400 Weather Description Use with sit set screw n xx=color for 400 Amp Plugs Description	Amp, Protective Cd Amp, Protective Cd Utype or doub eceptacles 300/400A: BK(Bl BN(B	le overs le ack), W(White rown), O(Orar Male	a), GN (Green), I Ige), Y(Yellow), . Female	HBL15NCx Catalog Nu HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S 300 Amp, Plugs	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10	Mx Devices ICAPx een), R(Re 6	HBL15DFx Fits Female D HBL15FCAP× d) and BL(Blue).	evices	Weather Description Use with st set screw n 300/400 Weather Description Use with st set screw n xx=color for 400 Amp Plugs	Protective Co uud type or doub eceptacles Amp, Protective Co uud type or doub eceptacles 300/400A: BK(BI BN(B	le overs le ack), W(White rown), O(Orar	e), GN (Green), I nge), Y(Yellow),	HBL15NCx Catalog Nu HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S 300 Amp, Plugs Description Thermoplastic elastomer, cable size #6 - 2/0 AWG	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10 Male	Mx Devices ICAPx een), R(Re 6	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue).	evices	Weather Description Use with st set screw in Description Description Use with st set screw in xx=color for 400 Amp Plugs Description Thermoplast cable size 2/	Protective Co ud type or doub ecceptacles Amp, Protective Co ud type or doub ecceptacles 300/400A: BK(BI BN(B c elastomer, 0 -4/0 AWG	le overs le ack), W(White rown), O(Orar Male	a), GN (Green), I Ige), Y(Yellow), . Female	HBL15NCx Catalog Nur HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S 300 Amp, Plugs Description Thermoplastic elastomer,	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10 Male	Mx Devices ICAPx een), R(Re 6	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue).	evices	Weather Description Use with si set screw r 300/400 Weather Description Use with si set screw r xx=color for 400 Amp Plugs Description Thermoplast cable size	Protective Cd dud type or doub eceptacles Amp, Protective Cd dud type or doub eceptacles 300/400A: BK(BI BN(B c elastomer, 0 -4/0 AWG	le overs le ack), W(White rown), O(Orar Male	a), GN (Green), I Ige), Y(Yellow), . Female	HBL15NCx Catalog Nur HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S 300 Amp, Plugs Description Thermoplastic elastomer, cable size #6 - 2/0 AWG 400 Amp, Receptacles, Stud Type	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10 Male HBL300M	Mx P Devices ICAPx een), R(Re 6 xx xx	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue). Female HBL300Fxx	evices	Weather Description Use with sti set screw in Description Description Description Use with sti set screw in xx=color for 400 Amp Plugs Description Thermoplast cable size 2/ 400 Amp Receptad Bus Bar	Protective Co and type or doub ecceptacles Amp, Protective Co and type or doub ecceptacles 300/400A: BK(BI BN(B c elastomer, 0-4/0 AWG	le overs le ack), W(White rown), O(Orar Male HBL400Mxx	e), GN (Green), I ige), Y(Yellow), . Female HBL400Fxx	HBL15NCx Catalog Nur HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S 300 Amp, Plugs Description Thermoplastic elastomer, cable size #6 - 2/0 AWG 400 Amp, Receptacles, Stud Type Description	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10 Male HBL300M; Fe	Mx Devices ICAPx een), R(Re 6	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue).	evices	Weather Description Use with si set screw r 300/400 Weather Description Use with si set screw r xx=color for 400 Amp Plugs Description Thermoplase cable size 2 400 Amp Receptad Bus Bar I Description	Protective Co and type or doub ecceptacles Amp, Protective Co and type or doub ecceptacles 300/400A: BK(BI BN(B celastomer, 0-4/0 AWG	le overs le ack), W(White rown), O(Orar Male	a), GN (Green), I Ige), Y(Yellow), . Female	HBL15NCx Catalog Nur HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S 300 Amp, Plugs Description Thermoplastic elastomer, cable size #6 - 20 AWG 400 Amp, Receptacles, Stud Type Description Panel mount, thermoplastic Thm elastomer, mates with W	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10 Male HBL300M: Cough Hole Fe fough Hole HBL300M:	Mx P Devices ICAPx reen), R(Re 6 xx male SLFRSxx	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue). Female HBL300Fxx Male HBLMRSxx	evices	Weather Description Use with si set screw r Oweather Description Use with si set screw r xx=color for A00 Amp Plugs Description Thermoplast cable size 2/ 400 Amp Receptaa Bus Bar	Protective Co dud type or doub eceptacles Amp, Protective Co dud type or doub eceptacles 300/400A: BK(BI BN(B celastomer, 0-4/0 AWG	le overs le ack), W(White rown), O(Orar Male HBL400Mxx Female	r), GN (Green), I nge), Y(Yellow), Female HBL400Fxx Male	HBL15NCx Catalog Nur HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S 300 Amp, Plugs Description Thermoplastic elastomer, cable size #6 - 2/0 AWG 400 Amp, Receptacles, Stud Type Description Panel mount, thermoplastic Elastomer, mates with M M 300 and 400 amp plugs Thm	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10 Male HBL300M: Cough Hole Guaph Hole HE Hole HE Hele Hele Hele Hele Hele Hele Hele He	Mx P Devices ICAPx reen), R(Re S xx male	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue). Female HBL300Fxx Male	evices	Weather Description Use with sit set screw n Description Use with sit set screw n Description Thermoplast cable size 2/ 400 Amp Plugs Description Thermoplast cable size 2/ 400 Amp Plugs Description Thermoplast cable size 2/	Protective Co dud type or doub eceptacles Amp, Protective Co dud type or doub eceptacles 300/400A: BK(BI BN(B celastomer, 0-4/0 AWG	le overs le ack), W(White rown), O(Orar Male HBL400Mxx Female	r), GN (Green), I nge), Y(Yellow), Female HBL400Fxx Male	HBL15NCx Catalog Nur HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S 300 Amp, Plugs Description Thermoplastic elastomer, cable size #6 - 2/0 AWG 400 Amp, Receptacles, Stud Type Description Panel mount, thermoplastic Elastomer, mates with M M 300 and 400 amp plugs Thm	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10 Male HBL300M	Mx P Devices ICAPx reen), R(Re 6 xx male SLFRSxx	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue). Female HBL300Fxx Male HBLMRSxx	evices	Weather Description Use with si set screw r Oweather Description Use with si set screw r xx=color for A00 Amp Plugs Description Thermoplast cable size 2/ 400 Amp Receptaa Bus Bar	Protective Co dud type or doub eceptacles Amp, Protective Co dud type or doub eceptacles 300/400A: BK(BI BN(B celastomer, 0-4/0 AWG	le overs le ack), W(White rown), O(Orar Male HBL400Mxx Female	r), GN (Green), I nge), Y(Yellow), Female HBL400Fxx Male	HBL15NCx Catalog Nur HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W LE POLE DEVICES S 300 Amp, Plugs Description Thermoplastic elastomer, cable size #6 - 2/0 AWG 400 Amp, Receptacles, Stud Type Description Panel mount, thermoplastic Thm elastomer, mates with M 300 and 400 amp plugs M 400 Amp, Receptacles,	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10 Male HBL300M: Cough Hole HBL300M: Fe Tough Hole HBL300M: Fe Tough Hole HBL300M: Fe Tough Hole HBL300M: Fe Tough Hole HBL30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Fe	Mx P Devices ICAPx reen), R(Re 6 xx male SLFRSxx	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue). Female HBL300Fxx Male HBLMRSxx	evices	Weather Description Use with si set screw r Description Use with si set screw r xx=color for A00 Amp Plugs Description Thermoplast cable size Bus Bar Description Thermoplast cable size Bus Bar Description Thermoplast cable size Bus Bar Description Thermoplast cable size add add add add add add add add add add	Protective Co and type or doub ecceptacles Amp, Protective Co and type or doub ecceptacles 300/400A: BK(BI BN(B b) c celastomer, 0 -4/0 AWG Cles, Mount thermoplastic ales with amp plugs	le overs le ack), W(White rown), O(Orar Male HBL400Mxx Female	r), GN (Green), I nge), Y(Yellow), Female HBL400Fxx Male	HBL15NCx Catalog Nut HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), W EDEDEDEVICESS SO Amp, Plugs Description Thermoplastic elastomer, cable size #6 - 2/0 AWG A00 Amp, Receptacles, Stud Type Description Panel mount, thermoplastic Panel mount, thermoplastic elastomer, mates with 300 and 400 amp plugs	HBL15D Fits Male HBL15M V(White), GN(Gr SERIES 10 Male HBL300M: Cough Hole HBL300M: Fe Tough Hole HBL300M: Fe Tough Hole HBL300M: Fe Tough Hole HBL300M: Fe Tough Hole HBL30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Tough Hole HBC30M: Fe Fe	Mx e Devices ICAPx reen), R(Re 6 xx xx simale stress	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue). Female HBL300Fxx Male HBLMRSxx HBLMRScxx Male	evices	Weather Description Use with sit set screw r Description Use with sit set screw r Description Thermoplast cable size 400 Amp Plugs Description Thermoplast cable size 400 Amp Receptae Bus Bar Description Panel mount elastomer, m 300 and 400 Tees Description Fits 300 and receptae	Protective Co and type or doub ecceptacles Amp, Protective Co and type or doub ecceptacles 300/400A: BK(BI BN(B b) c celastomer, 0 -4/0 AWG Cles, Mount thermoplastic ales with amp plugs	le overs le ack), W(White rown), Q(Orar Male HBL400Mxx Female HBLFRBxx Tapping Tee	e), GN (Green), I nge), Y(Yellow), Female HBL400Fxx Male HBLMRBxx Paraleling To	HBL15NCx Catalog Nut HBLNCxx R(Red) and E and C(Clear)
Devices Description Fits 150 amp plugs and receptacles Protective Caps Description Fits 150 amp plugs and receptacles x=color for 150A: BK(Black), V LE POLE DEVICES S 300 Amp, Plugs Description Thermoplastic elastomer, cable size #6 - 20 AWG Description Panel mount, thermoplastic elastomer, mates with 300 and 400 amp plugs The A00 Amp, Receptacles, Duble Set Screv Description Panel mount, thermoplastic elastomer, mates with 300 and 400 amp plugs The Panel mount, thermoplastic elastomer, mates with 300 and 400 amp plugs	HBL15D	Mx e Devices ICAPx reen), R(Re 6 xx xx simale simale simale simale	HBL15DFx Fits Female D HBL15FCAPx d) and BL(Blue). Female HBL300Fxx Male HBLMRSxx HBLMRSCxx Male HBLMRScx		Weather Description Use with st set screw r Description Use with st set screw r Description Thermoin T	Protective Co and type or doub ecceptacles Amp, Protective Co and type or doub ecceptacles 300/400A: BK(BI BN(B b) c) clastomer, c) -4/0 AWG Cles, Mournt Cles, Mournt amp plugs	le overs le ack), W(White rown), Q(Orar Male HBL400Mxx Female HBLFRBxx Tapping Tee	e), GN (Green), I nge), Y(Yellow), Female HBL400Fxx Male HBLMRBxx Paraleling To	HBLISNCx Catalog Nur HBLNCxx R(Red) and E and C(Clear)

To Order Call: MI 1-877-789-1626, TN 1-877-853-8106 or visit fourstarwire.com

STANDARD TERMS AND CONDITIONS OF SALE

- 1. FOUR STAR WIRE & CABLE, INC. will hereafter be referred to as FSW.
- 2. All orders are subject to acceptance of General Offices, in Sterling Heights, Michigan
- 3. Prices shown on quotations or on acknowledgements of orders are FSW's prices in effect on the date the quotation is made or the order is acknowledged. Shipments will be billed and paid for FSW's price the date shipments are made. Unless otherwise specified, quotations are based on seller's standard commercial domestic packing. Stenographic and clerical errors are subject to correction. Prices are effective when issued and subject to change without notice. Michigan Law shall cover this transaction.
- 4. Delivery and shipment dates indicated on quotations or on acknowledgements of orders are estimates only and are not guaranteed. In the event that there are any delays in the deliveries, FSW shall not be liable therefore, and the buyer agrees to accept such causes including, but not restricted to, acts of God or of the public enemy, acts of the government in either it's sovereign or contractual capacity, fires, floods, epidemics, quarantine restrictions, strikes, freight embargoes, and unusually severe weather, FSW may cancel buyer's order, in whole or in part, without liability to either party.
- 5. Payment of each invoice whether or not such invoice covers the entire order shall be made in accordance wit h the terms of the invoice.
- 6. If the buyer fails to fulfill the terms of payment of any invoice or if the financial responsibility of the buyer shall becom impaired or unsatisfactory assurances of buyer's credit standing are received by FSW. Where such acts or requirements of such governmental authority shall have been complied with, FSW also reserves the right in the case of any of the foregoing events to cancel the order, insuch event the buyer shall compensateFSW for any commitments, obligations, expenditures, expenses and costs that FSW may have incurred in connection with the order. Each shipment by FSW shall be considered a separate transaction and if payment is not received within the periods specified herein, FSW may bring a separate suit to recover the contract price of each such shipment. Overdue invoices shall bear a service charge. Buyer agrees to pay FSW's cost of collection of over due invoices, including reasonable attorney's fees.
- 7. FSW intends to supply cable in continuous lengths per spool or reel put-ups but cannot guarantee that each shipment will contain only continuous length material. If only continuous ength material is required, the order must state this. Hook-up wires may be supplied in noncontinuous lengths with the lengths not indicated on the spool. Spools of teflon wire maycontain more than one piece. Length may vary plus or minus 10% from length shown, all other lengths are exact.
- 8a. Special constructions and catalog variations represent specific factory production, are not off the shelf shipments and are noncancelable. FSW reserves the right to follow the wire industry practice of shipping within plus or minus 10% of the overall quantity ordered. In the case of special length requirements, and/or special constructions, 15% of the ordered lengths may be shipped in random length reels or spools.
- 8b. FSW will endeavor to make products available as ordered to meet buyer's requirements, but reserves the right to allot its production as it deems best. Buyer agrees that FSW shall not be liable or responsible to buyer to any extent upon failure to supply to buyer any amounts whichmay be agreed upon from time to time or making only part shipment against any order of buyer.
- 9. Products furnished hereunder shall be within tolerances, limits and sizes established by industry specifications.
- 10. FSW warrants that products delivered will be free from defects in material and workmanship.FSW makes no other warranty express or implied warranty or merchantability or fitness for use for a particular purpose which exceeds the foregoing warranty is hereby expressly disclaimed by FSW. Further, FSW shall not be liable for any consequential damages, loss or expensesarising in connection with the sale. Resale, use of or inability to use its products for any purpose whatsoever.
- 11. Claims of inoperative material must be made in writing within (30) days of delivery of catalog stock items and within ten (10) days of delivery of special constructions and/or catalog variations. Failure to give such notice within the specified time shall constitute and unqualified acceptance and waiver of all claims. FSW's liability and responsibility for inoperative products is specifically limited to the inoperative item or to credit toward the original billing. All replacements by FSW under the provisions of this clause shall be made free of charge, F.O.B. delivery point calls for in the original order. Products for which replacement has been made under the provisions of this clause shall become the property of FSW and shall be returned to FSW by the buyer, F.O.B. buyer's city, provided that FSW has first supplied the buyer with shipping instructions.
- 12. Under no circumstances are products to be returned to FSW without FSW'S written authorization and FSW reserves the rightto scrap any unauthorized returns on a no credit basis. No product may be returned after 60 days after invoicing.
- 13. FSW shall not be liable for infringement of any patent domestic or foreign, arising out of the use or resale of the products sold hereunder. Further, if such products are manufactured by FSW in accordance with the buyer's instructions or specifications the buyer will indemnify and hold FSW harmless from all liability or expense of any nature or kind what so ever based on or arising out of any claim of infringement of any patent, domestic or foreign.
- 14. Prices do not include sales, use, excise or similar taxes in addition to the prices specified herein, the amount of any suchpresent or future tax applicable to the sale, of the products hereunder, whether imposed by federal, state of local authorities shall be paid by the buyer.
- 15. Irrespective of who has paid for same, all tools, molds, dies or fixtures referred to in any quotation or order, shall become and remain the property of FSW. If buyer, for three (3) years does not order goods produced with such equipment, FSW may dispose of it.

Mission Statement

To provide a service standard that is unmatched that is unmatched in the industry and to continually improve our processes to maintain our " Customer First" philosophy with pride and integrity

Our accomplishments of yesterday will become our challenges today. We will strive each day to maintain our customer's loyalty and respect.

p.s.



West Branch 1931 S M-33 West Branch, MI 48661 Phone 989-404-7827 | 877-853-8106

Nashville 1420 Donelson Pike Ste, A-22 Nashville, TN 37217 Phone 615-467-0757 | Fax 615-467-0763 | 877-853-8106

Technical Support 1-866-445-463O

fourstarwire.com

StarS



mystarsound.com

tour star

